

FORM 4 PHYSICS

PAPER 1 MARKING SCHEME

1. Main scale reading=6.7
V scale reading=0.6

$$6.7 + 0.6 = 6.76$$

$$\text{Correct reading} = 6.76 - 0.02$$

$$= \underline{6.74\text{cm}}$$


2. A. Smoke particles are lighter than air particles and big enough to be seen.
B. The smoke particles are observed to be in continuous random motion.
C. The rate of continuous motion reduces due to decrease in k.e.

3. Water at 4°C is denser; it is also poor conductor of heat.

4. - Increase base area
- Lower C.O.G

5. $H = \frac{1}{2}gt^2$

6. a)

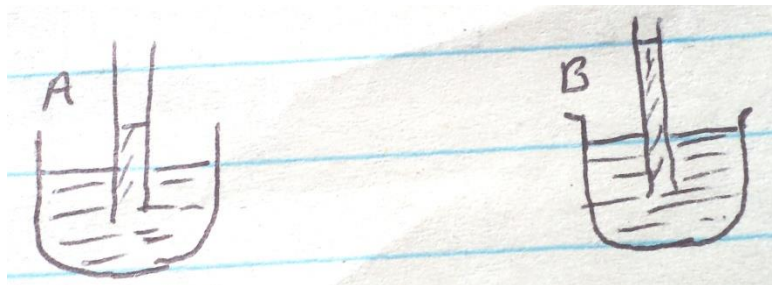

- b. The liquid level is high in pipe B than in pipe A because is low deu to the high speed of the air.

7. The bulb gets heated first and expands creating more volume.
-The mercury then gets heated and expands.

8. Gas pressure = $p_a + h\rho g$

$$= 1.0 \times 10^5 + (900 \times 10 \times 0.06)$$

$$= 10,000 + 540$$

$$= \underline{100,540 \text{ pa}}$$

9. $T = \frac{1}{50} = 0.02 \text{ sec}$

$$U = \frac{0.06}{0.02} = 30 \text{ cm/s}$$

$$V = \frac{2.6}{0.02} = 130 \text{ cm/s}$$

$$0.02$$

$$A = \frac{v-u}{t} = \frac{130-30}{7 \times 0.02}$$

$$= \frac{100}{0.14}$$

$$= \underline{\underline{714.29 \text{ cm/s}^2}}$$

10. For a thick glass, the inner wall expands more than the outer wall because glass is a poor conductor, while in a thinner one, the expansion is uniform.

$$\begin{aligned} 11. W &= \frac{1}{2} k e^2 \\ &= \frac{1}{2} \times 25 \times (0.1)^2 \\ &= \frac{1}{2} \times 25 \times 0.01 \\ &= \underline{\underline{0.125 \text{ J}}} \end{aligned}$$

SECTION B

12. A) Specific latent heat of fusion a substance required to melt completely one kilogram of a substance to liquid without change in temperature.

B i) $Q = ML$

$$= 0.02 \times 334,000 \text{ J}$$

$$= \underline{\underline{6680 \text{ J}}}$$

ii) $Q = Mcd\theta$

$$= 0.02 \times 4200 (t-0)$$

$$= \underline{\underline{84T \text{ J}}}$$

iii) Heat lost by warm water

$$= mc\Delta\theta$$

$$= \underline{\underline{0.2 \times 4200 (60-T)}}$$

Heat lost by calorimeter

$$= mc\Delta\theta$$

$$= \underline{\underline{0.08 \times 900 (60-T)}}$$

iv. Heat gained = Heat lost

$$6680 + 84T = 0.2 \times 4200 (60-T) + 0.08 \times 900 (60-T)$$

$$6680 + 84T = 50,400 + 4320 - 72T$$

$$996T = 48040$$

$$T = \underline{\underline{48.2^\circ \text{C}}}$$

$$13. R = ut = 5 \times 0.5$$

$$= \underline{\underline{2.5 \text{ ms}^{-1}}}$$

$$b. S = ut + \frac{1}{2}gt^2$$

$$u = 0$$

$$S = \frac{1}{2} \times 10 \times (0.5)^2$$

$$= 5 \times 0.25$$

$$= \underline{\underline{1.25 \text{ m}}}$$


$$c. i) m_1 u_1 + m_2 u_2 = (m_1 + m_2) v$$

$$(0.022 \times 300) = (0.022 + 1.978) v$$

$$6.6 = 2/2v$$

$$V = \underline{3.3 \text{ ms}^{-1}}$$

D i)

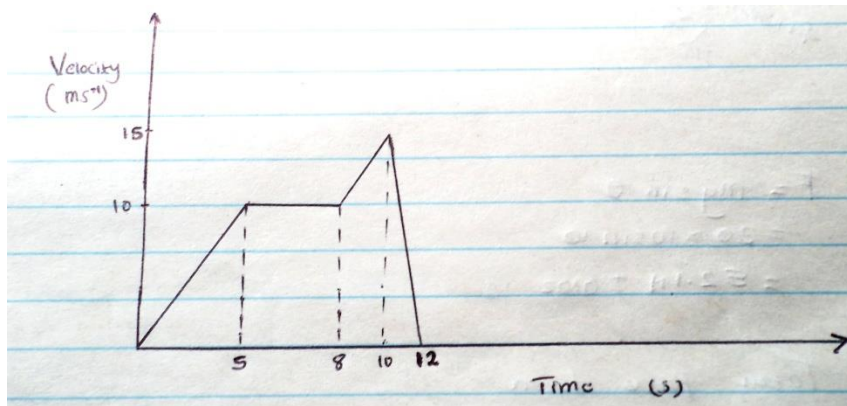

$$\text{ii) } 1/2 \times 5 \times 10 = 25$$

$$3 \times 10 = 30$$

$$(15+10) \times 1/2 \times 2 = 50$$

$$1/2 \times 2 \times 15 = 15$$

$$25+30+50+15 = \underline{120\text{m}}$$

14. A) Radius of the curve.
Critical speed.

B) I. $W = v/r$

$$= 5/2$$

$$= \underline{2.5 \text{ rads}^{-1}}$$


II) $T = F_c = \frac{mv^2}{r}$

$$= \frac{2 \times 5^2}{2}$$

$$= \underline{0.625 = 0.3125\text{N}}$$

$$= \underline{0.3125\text{N}}$$

15. (a) (i)

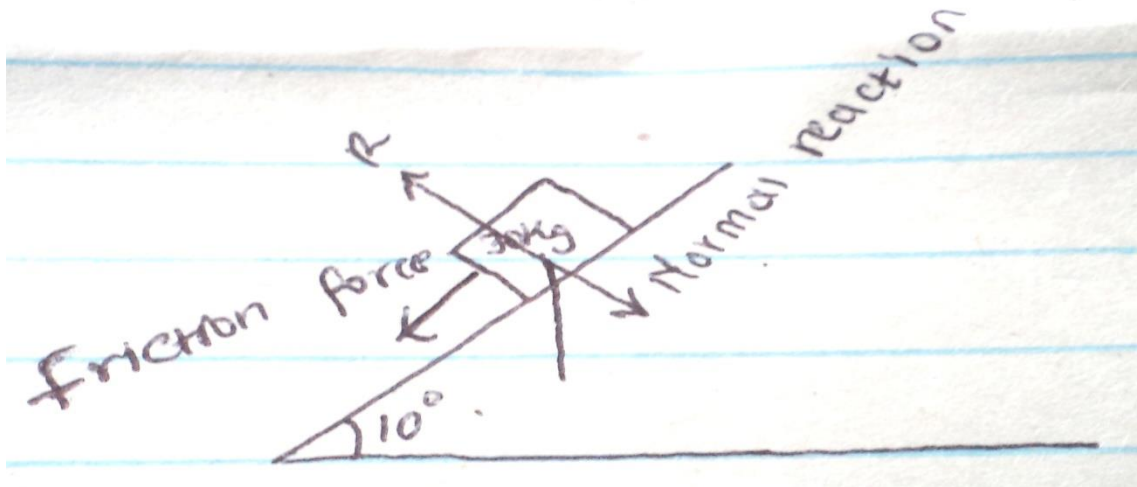

ii) $F = mg \sin \theta$
 $= 30 \times 10 \sin 10$

$= 52.1 \text{ N} \pm 0.02$
 iii) $F = \text{Total force down}$
 $= mg \sin \theta + \text{friction force}$
 $= 52.1 \text{ N} + 20.0 \text{ N}$
 $= 72.1 \text{ N}$

(b) (i) Friction force


(ii) Net force down $= mg \sin \theta - \text{friction force}$
 $= 52.1 - 20$
 $= 32.1$

But $F = ma$
 $A = f/m = \frac{32.1}{30} = 1.07 \text{ ms}^{-2}$


(iii) Acceleration downwards increases with increase in angle

16. (a)(i) The rate of change of momentum of the body is directly proportional to the applied force and takes place in the direction of force.

(ii)

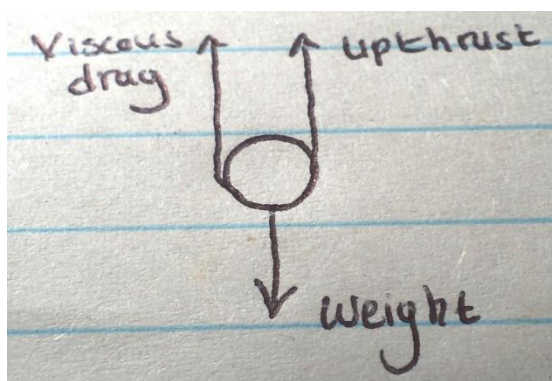

(iii)

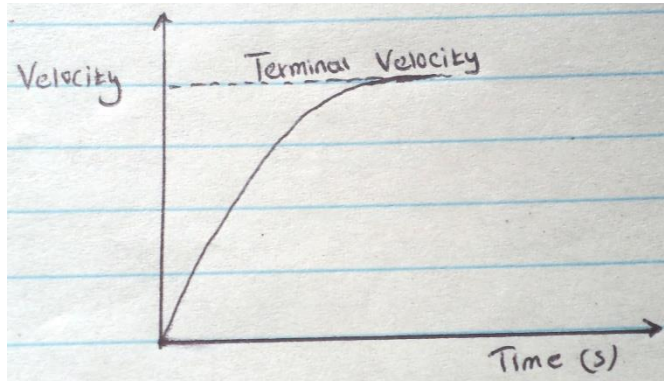

(b) (i) For a fixed mass of a gas pressure is inversely proportional to the volume at constant temperature.

(ii) Temperature at which the gas molecules have zero internal energy.

$$(iii) \frac{P_1 V_1}{T_1} = \frac{P_2 V_2}{T_2}$$

$$\frac{760 \times 80}{283} = \frac{1700 \times 38}{T_2}$$

$$T_2 = \frac{1700 \times 38 \times 283}{760 \times 80}$$

$$= 300.68$$

$$\text{Temp rise} = 300.68 - 283 = 17.69\text{k}$$

$$\underline{17.69\text{k}}$$